


## Wall mounted DMX512 Master SR-2811DMX



### Feature

- 1 zone
- Touch sensitive
- Glass interface(White & Black)
- Save color and mode function




### Parameter

Part No.	Input Voltage	Output	Size
SR-2811DMX	12-24VDC	DMX512 Signal	86x86x29.1


### Product Size



### Installation

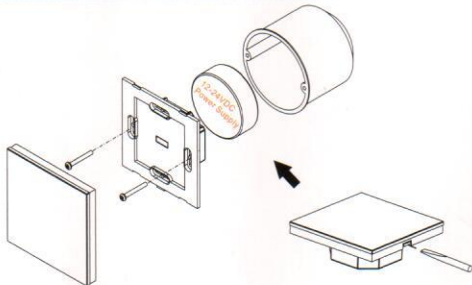

### Wiring diagram

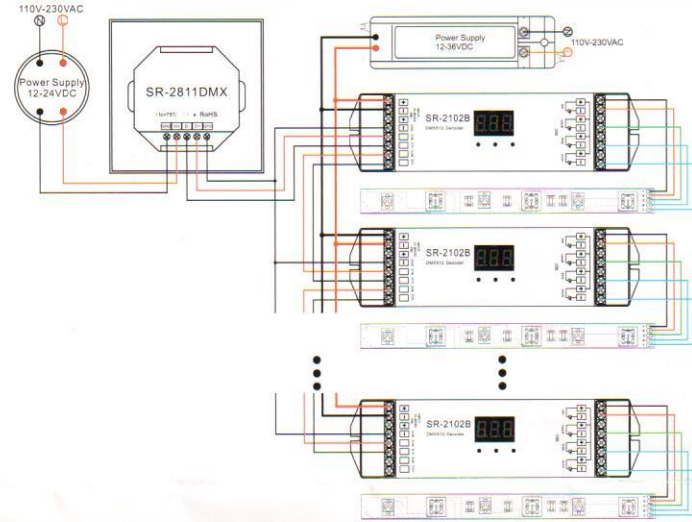

### Operation

- ▶ Play&pause button. There is only 1 build-in mode. When you touch ▶ this button, it will run.
- ⬅ Brightness ⬅ Speed down ➡ Speed up
- Ⓢ Button can save the color from mode or save color when you touch color wheel. In "S" button, it saved "R/ G/ B" 3 colors in default. But with your operation, you can save another 3 colors replace those R/G/B colors. When you press Ⓢ this button, 1 build-in mode will run, if now you see a favorite mode, then you can press "S" button for 5 seconds until connected lighting flashes. Then it saved successfully. When you touch color wheel, if you touch a favorite color on it, then you want to save it, then you press "S" button for 5 seconds until the connected lighting flashes. Then it saved successfully.
- ☺ For Warm white, Natural white, Cool white changing. (Through the three RGB color mixing)
- 🌈 Touching wheels Ⓢ Switch off and on, long press means default setting
- Ⓡ Ⓢ Ⓡ Ⓢ Short press means switch on and off for each channel. 1st Long press means brightness+, 2nd Long press means brightness—.

At the corner of the panel there is a signal light, Blue means on, Red means off

3.2 Set the address:  
One 2811DMX has 40 addresses, 001 005 009 013..... 037.  
001=1, 2, 3, 4=RGBW  
005=5, 6, 7, 8=RGBW  
009=9, 10, 11, 12=RGBW

037=37, 38, 39, 40=RGBW  
We may set any address(same or different) from 001 005 009-037.

## Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

## Warranty Agreement

- 1) We provide lifelong technical assistance with this product:

- 3-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.

- For faults beyond the 3-year warranty we reserve the right to charge for time and parts.

- 2) Limited Warrenty

- Any defects caused by wrong operation.

- Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.

- Any damages due to transportation, vibration etc. after purchase.

- Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.

- Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.

- Product has been updated

- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.